Small DiameterBall Valve

1/2" - 3/4" - 1" Forged Ball Valves - 4,000 PSI





SPECIFICATIONS





We are committed to product safety and quality. Argus Ball Valves conform to the following standards:

API AMERICAN PETROLEUM INSTITUTE

STD 598 Valve Inspection and Testing

STD 607 Fire Test for Quarter-turn Valves and Valves Equipped with Nonmetallic Seats

SPEC Q1 Quality Management System Requirements for Organizations Providing Products

for the Petroleum and Natural Gas Industry

ASME AMERICAN SOCIETY OF MECHANICAL ENGINEERS

B16.34 Valves - Flanges, Threaded and Welding End

B1.20.1 Pipe Threads, General Purpose

B31.3 Process Piping

ISO INTERNATIONAL ORGANIZATION FOR STANDARDIZATION

ISO 9001 Quality Management System

ISO 5208 Industrial Valves - Pressure Testing of Metallic Valves
ISO 5211 Industrial Valves - Part Turn Actuator Attachment

ISO 10497 Testing of Valves - Fire Type Testing

ISO 15156 Materials for Use in H2S Containing Environments in Oil and Gas Production

MSS MANUFACTURERS STANDARDIZATION OF THE VALVE AND FITTINGS INDUSTRY

MSS SP-25 Standard Marking System for Valves, Fittings, Flanges and Unions

NACE NATIONAL ASSOCIATION OF CORROSION ENGINEERS

MR0175 Materials for Use in H2S Containing Environments in Oil and Gas Production


CSA CANADIAN STANDARDS ASSOCIATION

Z245.15 Steel Valves

CRN CANADIAN REGISTRATION NUMBER

OC18095.2 Ball Valves

EXPLODED VIEW WITH PARTS LIST

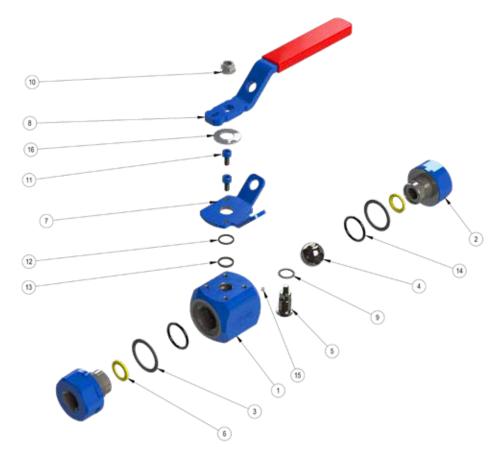


ITEM	QTY.	DESCRIPTION			
1	1	Main Body			
2	2	End Connection, FNP1			
3	2	Fire Safe Gasket			
4	1	Ball			
5	1	Stem			
6	2	Seat			
7	1	Locking Plate			
8	1	Operating Handle			
9	1	Thrust Bearing			
10	1	Flange Locknut			
11	2	Handle Stop Cap Screw			
12	1	Back-up Ring			
13	1	Stem O-ring			
14	2	Body O-ring			
15	1	Anti-static Spring			
16	1	Belleville Washer			

CONSIDER THESE BENEFITS

- Materials compliant to NACE MR0175 for sour service.
- Temperature rating -50°F to +250°F (-46°C to +121°C).
- Pressure rated to 4,000 psi W.O.G.
- API 607 Fire Safe graphite secondary gasket ensures safety in the event of a fire. The ball and stem realign, creating a metal to metal seal.
- Blowout preventative stem enhances safety.
- Valve bores .500", .750" and 1.00".

- Seat design ensures sealing at high and low ends of pressure rating.
- Lockout design for additional security and safety.
- O-ring stem seal, packing is not required, reducing maintenance requirements.
- Low operating torque provides ease of operation.
- Antistatic design reduces ignition hazards.
- Standard ISO 5211 mounting for simple valve automation.

DIMENSIONAL DRAWINGS & CHARTS

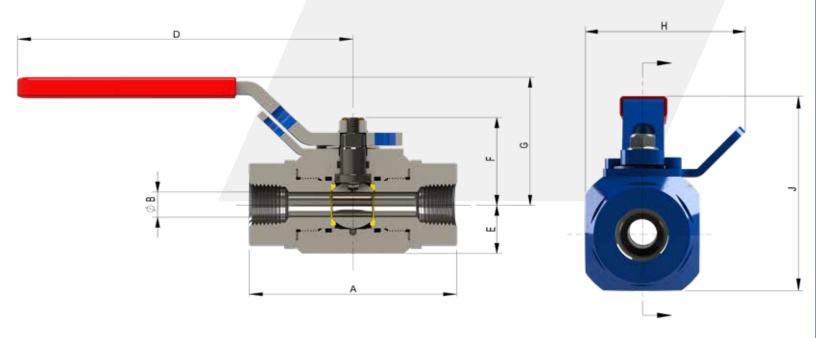

	LVE ZE	DIMENSION										WEIGHT							
N		Į.	4	E	3			ı			=	(5	H	1		J	WLI	J
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb	kg
1/2"	13	3.88	98	0.50	13	6.25	159	0.97	25	1.72	44	2.50	64	2.75	70	3.47	88	3.4	1.5
3/4"	19	4.25	108	0.75	19	6.50	165	1.23	31	2.03	52	3.00	76	3.13	80	4.23	107	5.2	2.4
1"	25	4.75	121	1.00	25	6.88	175	1.52	39	2.40	61	3.50	89	3.60	91	5.02	127	8.4	3.8

Mounting - Please see TB-BV-002

Applications

- Oil & Gas
- Refining
- Petrochemical
- Water / wastewater
- Other process piping applications

STANDARD TRIM MATERIALS							
Component	Sour - Low Temp	Stainless - Low Temp					
Body	A350-LF2, Class 1	A479-316					
End Connections	A350-LF2, Class 1	A479-316					
Ball	A351-CF8M c/w ENC	A351-CF8M c/w ENC					
Stem	AISI 4130 c/w ENC	A479-XM-19					
Seat	Devlon V-API	PEEK					
Stem Thrust Washer	Nylatron GS	PEEK					
Primary Seals	HSN	HSN					
Secondary End Connection Seal	Graphite	Graphite					

Optional: Spring Return Handle

Socket Weld / Male NPT End Connections

Alternate Trim Materials



REGISTRATION NO. Q1-0424

Certificate of Registration

The American Petroleum institute certifies that the quality management system of

ARGUS MACHINE CO. LTD. 5820 - 97th Street NW Edmonton, AB Canada

has been assessed by the American Petroleum frutifute and found to be in conformance with the following:

API Specification Q1

Design, Manufacture and Assembly of Pigging Systems, Pressure Switches, Wiring Harnesses, Cementing Equipment and Valves; Manufacture of Couplings, Oilfield Connectors and Drill Stem Subs; Provision of General Machining and Threading Services

API approves the organization's justification for excluding:



Effective Date:

AUGUST 26, 2020 Expiration Date: SEPTEMBER 20, 2023 Registered Since: DECEMBER 18, 2006





Certificate of Registration

APIQR' REGISTRATION NUMBER

0686

This certifies that the quality management system of

ARGUS MACHINE CO. LTD. 5820 - 97th Street NW Edmonton, AB Canada

bas been assessed by the American Petroleum Institute Quality Registrar (APIQR®) and found it to be in conformance with the following standard:

ISO 9001:2015

The scope of this registration and the approved quality management system applies to the

Design, Manufacture and Assembly of Pigging Systems, Pressure Switches, Wiring Harnesses, Cementing Equipment and Valves; Manufacture of Couplings, Oilfield Connectors and Drill Stem Subs; Provision of General Machining and Threading Services

APIQR® approves the organization's justification for excluding

No Exclusions Identified as Applicable

Effective Date: Expiration Date: Registered Since:

AUGUST 26, 2020 SEPTEMBER 20, 2023 **SEPTEMBER 20, 2011** Aun Opfings

Vice President of Global Industry Services





1.888.434.9451 info@argusinnovates.com

argusinnovates.com